

Electric Contact Differential Pressure Gauges (ECDP Series)

<HSI>

Pressure/ Temperature Instrument

Summary

- 2개의 Process Connections 장착
- 산업 공정의 제어 및 규제
- 플랜트 모니터링 및 전기 회로 전환
- 저압 및 고압 측정 (차압)
- 액체의 유량, 차압 측정
- 3way 및 5 way manifold valve 사용 권장

Standard features

Diameter

100,150mm

Accuracy

100,150mm : $\pm 1.5\%$ of Full Scale

Scale Range

100,150mm : -5kPa~1MPa

Process connection

100,150mm : PT - 1/4" (Fe)

Material

Case, Cover : STS 304

Window : Safety glass

Element : STS304, STS316, Bellows

Movement : STS304

Pointer : Aluminum Alloy

Connecting method

U-bolt for 2B pipe

Contact Rating

AC 125V 0.5A / 250V 0.25A

Option

Test Report by Manufacturer

Test Report by KOLAS

ECDP Series



Pressure Gauge

Temperature Gauge

Pressure Limitation

Steady : 3/4 of full scale (75%)

Over pressure protection : 100kPa

Operating Temperature

Ambient : -20 ~ 65℃

Fluid: -20 ~ 40 ℃

Temperature Element


Electric Contact Differential Pressure Gauges

(ECDP Series)

<HSI>

Pressure/ Temperature Instrument

Type of Mounting

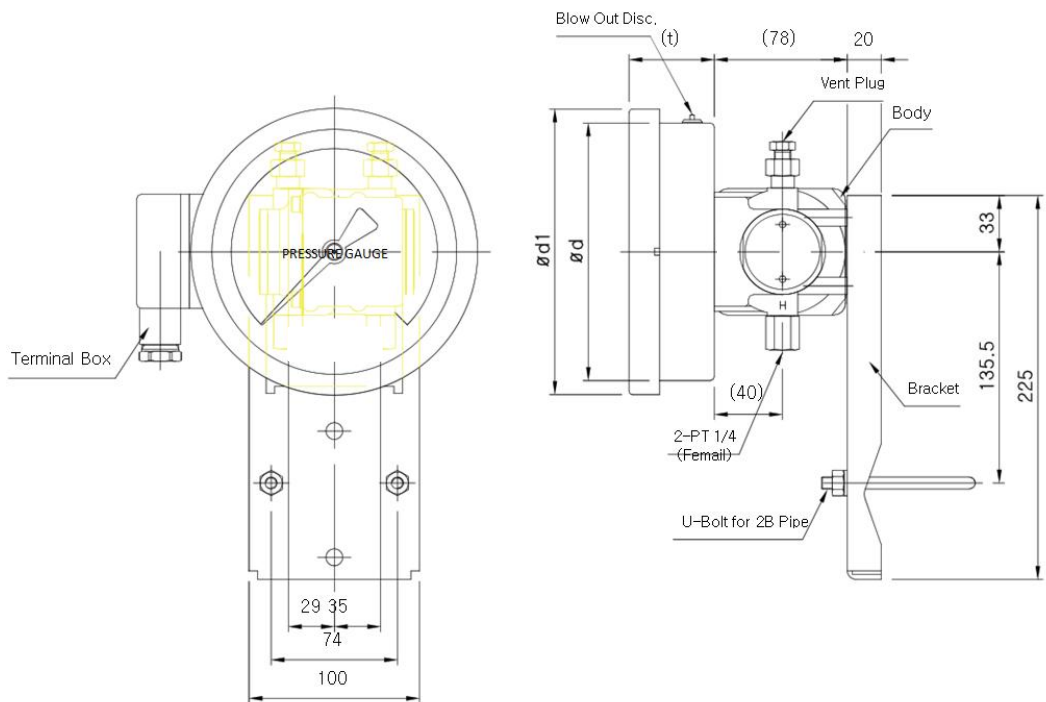

Dial	Model	Ød	Ød1	t
100	ECDP-100	114	100	46
150	ECDP-150	168	152	50

Connection Diagram

