

● **Thermal protection、 Low noise**




PGS SERIES SELF-PRIMING POOL PUMP

PGS



- Use high quality polypropylene to make the pump more durable.
- Ceramic carbon mechanical seal is more safe and stable.
- New design for the inner part improve the efficiency and reduce the noise.
- High performance motor with thermal protection
- Pump inlet/outlet with external thread can connect with metric/imperial pipe, more convenient to operate.

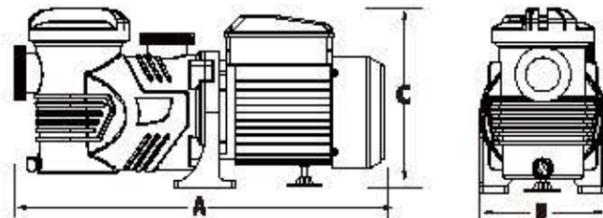



Model	Motor Power (HP)	Voltage (V)	Frequency (RPM)	Q _{max} (m³/h)	H _{max} (mtr)	Connections (mm)	A (mm)	B (mm)	C (mm)
PGS033	0.33	220~240	2850	8.5	8.1	48/50	460	160	230
PGS050	0.5	220~240	2850	11.0	10.2	48/50	460	160	230
PGS075	0.75	220~240	2850	13.0	10.8	48/50	485	160	230
PGS100	1.0	220~240	2850	16.5	11.2	60/63	485	160	230
PGS120	1.2	220~240	2850	19.0	12.4	60/63	485	160	230

PG SERIES SELF-PRIMING POOL PUMP

PG



- Use high quality polypropylene to make the pump more durable.
- Carbon with ceramics mechanical seal is more safe and stable.
- New design for the inner part improve the efficiency and reduce the noise.
- High performance motor with thermal protection
- The pump can bear 25000 times of impact test, excellent performance and reliable quality.

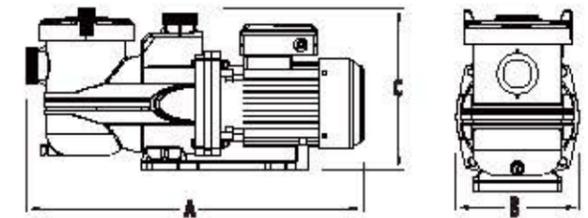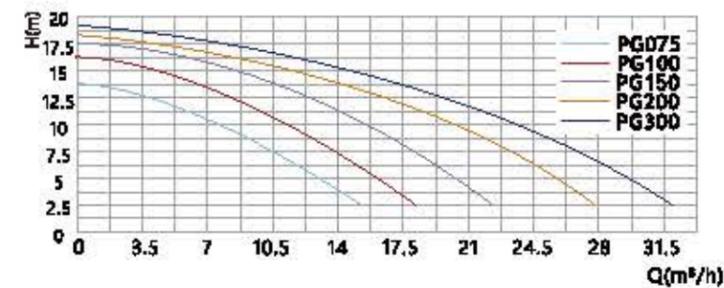

Model	Motor Power (HP)	Voltage (V)	Frequency (RPM)	Q _{max} (m³/h)	H _{max} (mtr)	Connections (mm)	A (mm)	B (mm)	C (mm)
PG075	0.75	220/380	2850	15.3	14	48/50	595	200	295
PG100	1.0	220/380	2850	17.6	16	48/50	595	200	295
PG150	1.5	220/380	2850	22.5	17.5	48/50	605	200	295
PG200	2.0	220/380	2850	27.9	18	60/63	605	200	295
PG300	3.0	220/380	2850	32.1	19	60/63	605	200	295