

- **Safe、Stable**





PL SERIES SELF-PRIMING POOL PUMP

PL



- IP55 waterproof standard.
- High flow rate.
- Maximum working pressure : 6kg/cm².
- 316 stainless steel shaft.
- Graphite/ceramic mechanical seal.
- Maximum water temperature : 70°C

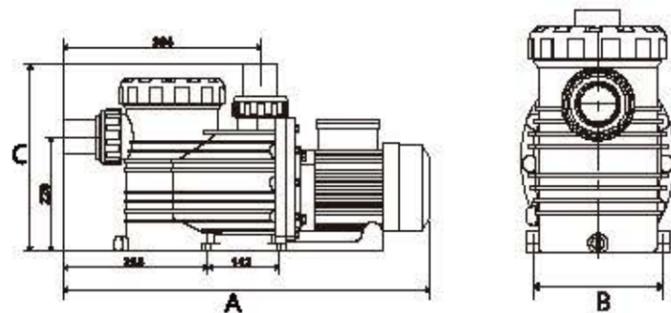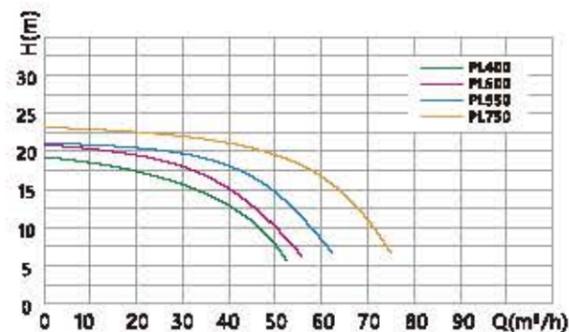

Model	Motor Power (HP)	Voltage (V)	Frequency (RPM)	Q _{max} (m³/h)	H _{max} (mtr)	Connections (mm)	A (mm)	B (mm)	C (mm)
PL400	4	380	2900	52	19	75	750	199	373
PL500	5	380	2900	56	21	75	750	199	373
PL550	5.5	380	2900	61	21	75/90	770	199	373
PL750	7.5	380	2900	75	23	75/90	780	199	373



* 50/60Hz pump can be customized.

PLS SERIES SELF-PRIMING POOL PUMP

PLS



- IP55 waterproof standard.
- High flow rate.
- Maximum working pressure : 6kg/cm².
- 316 stainless steel shaft.
- Graphite/ceramic mechanical seal.
- Two standard DN40 unions are easy to install.

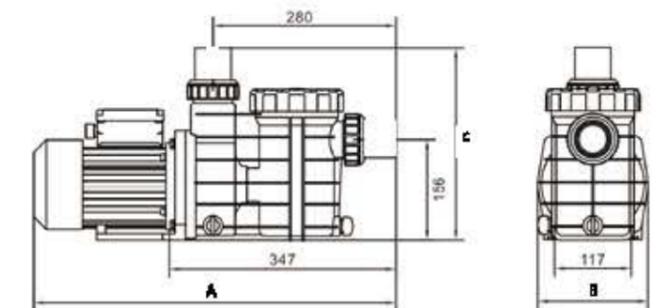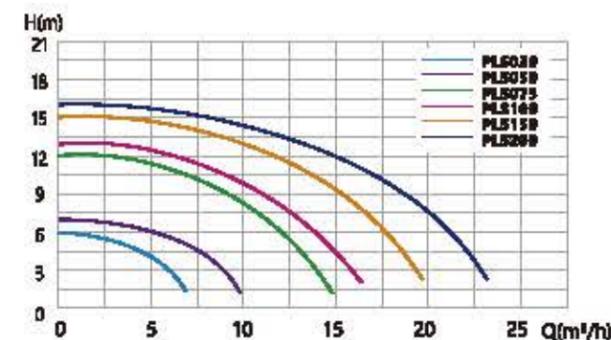

Model	Motor Power (HP)	Voltage (V)	Frequency (RPM)	Inlet/Outlet (mm)	H _{max} (m)	Q _{max} (m³/h)	A (mm)	B (mm)	C (mm)
PLS-030	0.33	220	2900	48/50	6	7	500	168	245
PLS-050	0.50	220	2900	48/50	7	10	500	168	245
PLS-075	0.75	220	2900	48/50	12	15	500	168	245
PLS-100	1.00	220	2900	48/50	13	16	500	168	245
PLS-150	1.50	220	2900	48/50	15	20	500	168	245
PLS-200	2.00	220	2900	48/50	16	23	500	168	245

* 110v/220v/380v, 50/60Hz pump can be customized.