

- **Continuous operation**





SWP SERIES SELF-PRIMING POOL PUMP

SWP



- This pump is independently designed to meet the market demand.
- Single speed or double speed is available.
- Inlet and outlet be reinforce by a stainless steel ring.
- Integral structure handle, convenient installation.

Inlet diameter

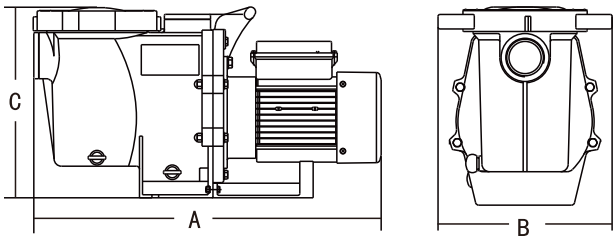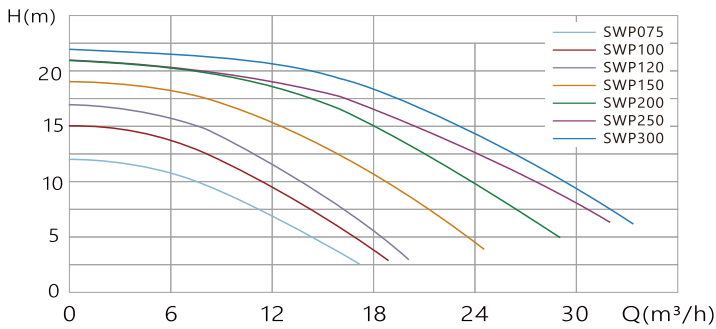



Model	Motor Power (HP)	Voltage (V)	Frequency (RPM)	Qmax (m³/h)	Hmax (mtr)	Connections (mm)	A (mm)	B (mm)	C (mm)
SWP075	0.75	220	2900	17.1	12	60/63	572	276	314
SWP100	1.00	220	2900	18.9	15	60/63	572	276	314
SWP120	1.20	220	2900	20.1	17	60/63	572	276	314
SWP150	1.50	220	2900	24.0	19	60/63	572	276	314
SWP200	2.00	220	2900	28.8	21	60/63	572	276	314
SWP250	2.50	220	2900	31.8	21	60/63	572	276	314
SWP300	3.00	220	2900	33.0	22	60/63	585	276	314

WTB COUNTER FLOW PUMP

WTB



- Material : fiberglass plastics.
- Continuous operation.
- IP55 waterproof standard.
- Medium temperature:5~50°C.
- Max.working pressure:0.3Mpa.
- Ultra-quiet.
- Maximum working pressure : 6kg/cm².
- 316 stainless steel shaft.

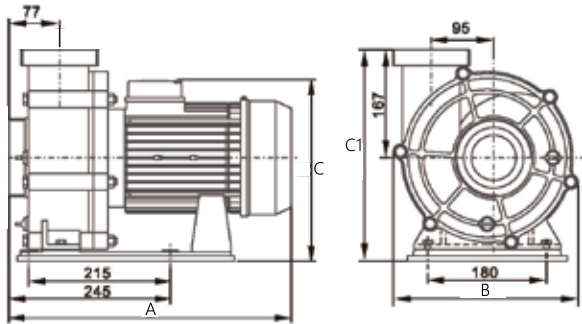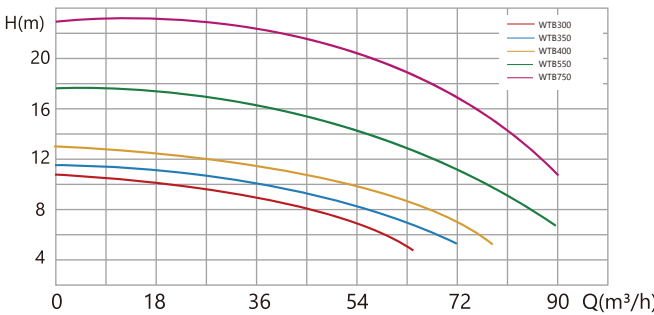

Model	Qmax (m³/h)	Hmax (m)	Motor Power (HP)	Amps		Connections (mm)	A (mm)	B (mm)	C (mm)	C1 (mm)
				220v/50Hz	380v/50Hz					
WTB300	66	11	3.0	10	4.1	75	412	281	301	323
WTB350	72	11.5	3.5	13.7	4.9	75	412	281	301	323
WTB400	78	13	4.0	-	5.2	90	412	281	274	323
WTB550	90	17.5	5.5	-	7.0	90	429	281	274	323
WTB750	90	23	7.5	-	9.6	110	469	281	274	335